

### GENERAL SPECIFICATIONS:

- Display: 6\*15mm digit LCD display with white LED backlight
- Capacities: 6Kg – 30Kg
- Pan size: 343x263mm
- Keyboard: 2keys (membrane keyboard)
- Housing: ABS plastic, SST pan
- Max. Divisions: 3000e; 2x3000e;
- Operate Humidity: <85%RH
- Operate Temp.: -10°C~+40°C
- Power: powered by USB
- Input: AC100~240V, 50/60Hz – Output: DC 12V/500mA




### MAIN FEATURES:

- Function: Zero; Tare
- AISI 304 Stainless steel pan
- Low profile and ABS housing with durable steel bottom cover
- 1.5m length communication cable
- Standard RS232 port can be connect to PC, POS or ECR
- Optional Bluetooth 4.0 communication (DL-B)
- Rechargeable battery, provide up to 120 hours of continuous use (DL-B)

### SPECIFICATIONS:

Model Name	Capacity	Readability	Division	Approx. Weight
DL-A--6K-M	6Kg	2g	3000e	4.5Kg
DL-A-15K-M	15Kg	5g	3000e	4.5Kg
DL-A-30K-M	30Kg	10g	3000e	4.5Kg
DL-A-6K-MR	3/6Kg	1/2g	2x3000e	4.5Kg
DL-A-15K-MR	6/15Kg	2/5g	2x3000e	4.5Kg
DL-A-30K-MR	15/30Kg	5/10g	2x3000e	4.5Kg
DL-B-6K-M	6Kg	2g	3000e	4.5Kg
DL-B-15K-M	15Kg	5g	3000e	4.5Kg
DL-B-30K-M	30Kg	10g	3000e	4.5Kg
DL-B-6K-MR	3/6Kg	1/2g	2x3000e	4.5Kg
DL-B-15K-MR	6/15Kg	2/5g	2x3000e	4.5Kg
DL-B-30K-MR	15/30Kg	5/10g	2x3000e	4.5Kg

**DIMENSIONS:**

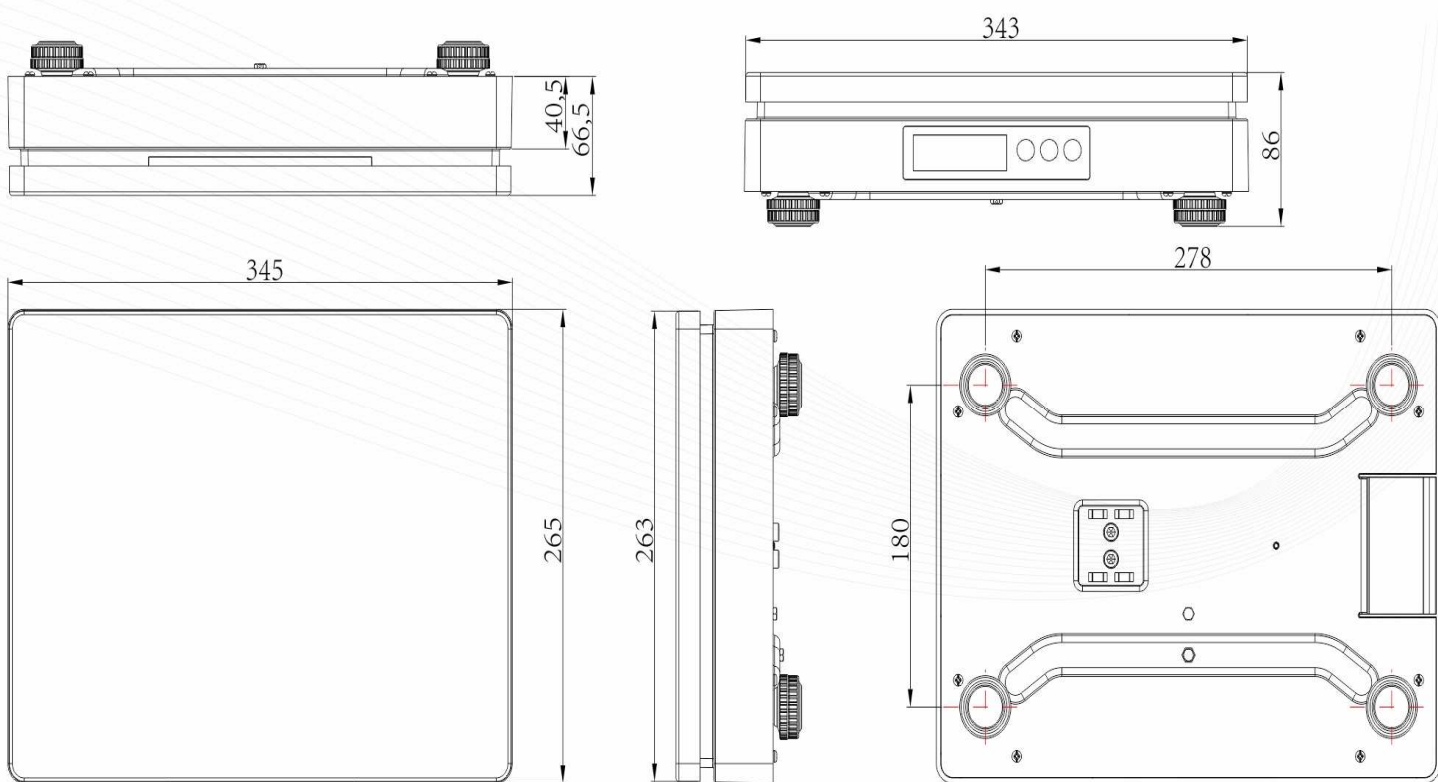

Global Measurement Srl  
Via Olona 183/N, 21013 Gallarate (VA)  
Tel: 0331/786999 Fax: 0331/213964  
info@global-measurement.it www.global-measurement.it